



















More information on the website  
radwag.com/en/info,w1,7C6

# WLY 60/PGC/C2/R Scale



## Functions

-  Dosing
-  Labelling
-  Plus/Minus Control
-  Percent Weighing
-  Totalizing
-  Parts counting
-  Peak hold
-  Formulation
-  Newton unit measurement
-  Statistics
-  Checkweighing
-  IR sensors
-  Animal weighing
-  Differential weighing
-  Packaged Goods Control
-  ALIBI Memory

## Datasheet

Metrological parameters	
Maximum capacity [Max]	60 kg
Minimum load	0,5 kg
Readability [d]	10 g
Tare range	-120 kg
Verification scale interval [e]	10 g
Repeatability	10 g

Metrological parameters	
Linearity	±10 g
Stabilization time	3 s
Adjustment	external
OIML Class	II
Physical parameters	
Levelling system	manual
Display	5,7" resistive colour touchscreen
Weighing pan dimensions	400×500 mm
Packaging dimensions	720×580×220 mm
Net weight	12,5 kg
Gross weight	15 kg
Protection class	IP 43
Communication interface	
Communication interface	2×RS232, 2×USB-A, Ethernet, 4 IN / 4 OUT (digital), Wi-Fi
Electrical parameters	
Power supply	100 ÷ 240 V AC 50 / 60 Hz
Environmental conditions	
Operating temperature	+15 ÷ +30 °C
Storage temperature	-25 - +70 °C
Relative humidity	10% ÷ 85% RH no condensation

\* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



## Accessories

Receipt Printer  
Barcode scanners  
Label Printers  
Cigarette lighter receptacle power supply cables  
USB Hubs  
Displays  
IN/OUT Cables


Keypad, external switches  
Stands, wall mounting kits and mounting brackets  
F1 Mass Standard - knob weights without adjustment chamber, set  
AP2-1 Current Loop Unit  
RS 232, RS 485 cables  
RS 232 – USB Converter  
RS 232 cables (scale - EPSON printer)

## Software



E2R System  
Audit Trail Reader  
RADWAG Connect  
RADWAG Remote Desktop  
RADWAG Development Studio  
Scales Editor 2.0

RAD-KEY  
LabVIEW Driver  
Label Editor R02  
R-LAB  
R.Barcode



## Device dimensions



F1 version

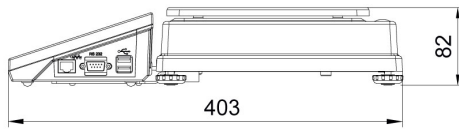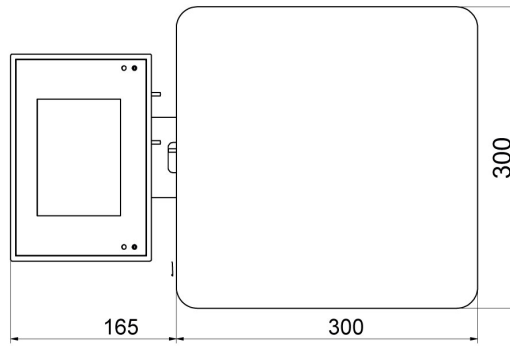

D2 version

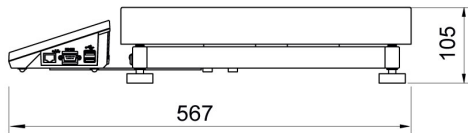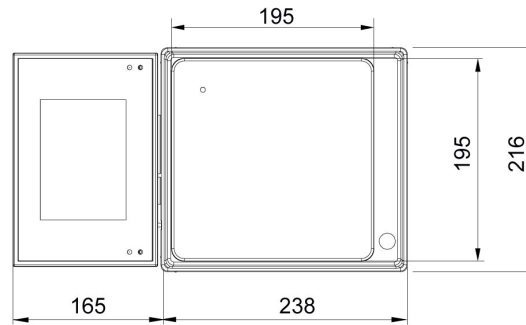

C2 version

